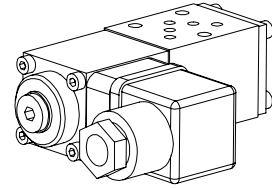


Solenoid poppet valve

- 2/2-way sandwich construction
- $Q_{max} = 6 \text{ l/min}$
- $p_{max} = 350 \text{ bar}$

NG3-Mini[®]

DESCRIPTION

Poppet valve, sandwich design NG3-Mini according to Wandfluh standard, available as a 2/2-way valve normally open or closed. The central functioning element of all directly controlled poppet valves in the NG3 series is the poppet valve cartridge NG3. See data sheet 1.11-2010. The solenoids correspond to VDE standard 0580.

Important: When commissioning, the valve must be vented under pressure (max. 2 revolutions of screw E).

FUNCTION

The valve is direct operated by a wet pin push type solenoid which in turn either opens or closes the poppet. The design of the poppet spool, which is equal in surface area on both sides and thus pressure balanced, means there are no undue opening and closing hydraulic forces. Due to this the oil flow through the poppet valve is possible in both directions. The valve is tight in both flow directions.

APPLICATION

Wandfluh poppet valves can be used anywhere absolutely leak tight closing functions are important. Completely sealed loading, gripping and clamping operations are all important functions which Wandfluh poppet valves can perform. NG3-mini valves are used where a light, compact unit is needed.

CONTENT

| | |
|--------------------------------|---|
| GENERAL SPECIFICATIONS | 1 |
| HYDRAULIC SPECIFICATIONS | 1 |
| ELECTRICAL CONTROL | 1 |
| CHARACTERISTICS | 2 |
| TYPE CHARTS | 2 |
| DIMENSIONS | 3 |
| PARTS LIST | 3 |
| ACCESSORIES | 3 |

TYPE CODE

| | | | | | | | | | | | |
|------------------------------------|-----|---------|------|---|----|--|--|---|--|---|--|
| | Z | | 2 | 2 | 03 | | | - | | # | |
| Poppet valve construction sandwich | | | | | | | | | | | |
| Medium | M | | | | | | | | | | |
| Super | S | | | | | | | | | | |
| 2-way (connections) | | | | | | | | | | | |
| 2 positions | | | | | | | | | | | |
| Nominal size 3 | | | | | | | | | | | |
| Normally closed, | 1 | | | | | | | | | | |
| Normally open, | 0 | | | | | | | | | | |
| Poppet valve in: | | | | | | | | | | | |
| P | P | T | T | | | | | | | | |
| A and B | AB | A | A | B | B | | | | | | |
| Standard nominal voltage U_N : | | | | | | | | | | | |
| 12 VDC | G12 | 110 VAC | R110 | | | | | | | | |
| 24 VDC | G24 | 115 VAC | R115 | | | | | | | | |
| | | 230 VAC | R230 | | | | | | | | |
| Design-Index (Subject to change) | | | | | | | | | | | |

GENERAL SPECIFICATIONS

| | |
|--------------------------|--|
| Description | 2/2-way poppet valve |
| Nominal size | NG3-Mini acc. to Wandfluh standard |
| Construction | Direct operated poppet valve |
| Operations | Solenoid |
| Mounting | Sandwich constr., 3 mounting holes for socket head screws or locking screws M4 |
| Connections | Threaded connection plates Multi-flange subplates Longitudinal stacking system |
| Ambient temperature | -20...+50°C |
| Mounting position | any, preferable horizontal |
| Fastening torque | $M_D = 2,8 \text{ Nm}$ (quality 8.8) |
| Masse poppet valve in: | |
| A, B, P or T | $m = 0,46 \text{ kg}$ |
| A and B normally closed. | $m = 0,56 \text{ kg}$ |
| A and B normally open | $m = 0,62 \text{ kg}$ |
| Volume flow direction | any (see characteristics) |

HYDRAULIC SPECIFICATIONS

| | |
|--------------------------|---|
| Fluid | Mineral oil, other fluid on request |
| Contamination efficiency | ISO 4406:1999, class 20/18/14 (Required filtration grade $B_{10...16} \geq 75$) refer to data sheet 1.0-50/2 |
| Viscosity range | 12 mm ² /s... 320 mm ² /s |
| Fluid temperature | -20...+70°C |
| Working pressure | Medium: $p_{max} = 125 \text{ bar}$ Super: $p_{max} = 350 \text{ bar}$ to ZS22030AB $p_{max} = 315 \text{ bar}$ |
| Max. volume flow | $Q_{max} = 6 \text{ l/min}$ see characteristics |


ELECTRICAL CONTROL

Construction Solenoid, wet pin push type, pressure tight
 Standard-nominal voltage $U_N = 12 \text{ VDC}, 24 \text{ VDC}$
 $U_N = 110 \text{ VAC}^*, 115 \text{ VAC}^*, 230 \text{ VAC}^*$
 $AC = 50 \text{ to } 60 \text{ Hz}$
 * Rectifier integrated in the plug
 Other nominal voltages and nominal performances on request
 Voltage tolerance $\pm 10\%$ of nominal voltage
 Protection class IP 65 to EN 60 529
 Relative duty factor 100% DF (see data sheet 1.1-430)

Switching cycles 15'000/h
 Operating life 10^7 (number of switching cycles, theoretically)
 Connection/Power supply Over device plug connection to ISO 4400/
 DIN 43650, (2P+E), other connections on request
 Solenoid:
 - Medium SIN29V (1.1-80)
 - Super SIS29V (1.1-85)


CHARACTERISTICS Oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$

$p = f(Q)$ Performance limit by standard voltage at -10 % Super

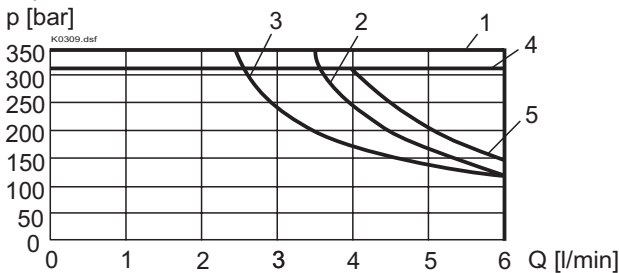


| Type | Flow direction | |
|-----------|----------------|-------|
| | 1 → 2 | 2 → 1 |
| ZS22031P | 1 | 2 |
| ZS22031T | 1 | 2 |
| ZS22031A | 1 | 2 |
| ZS22031B | 1 | 2 |
| ZS22031AB | 1 | 2 |
| ZS22030P | 1 | 3 |
| ZS22030T | 1 | 3 |
| ZS22030A | 1 | 3 |
| ZS22030B | 1 | 3 |
| ZS22030AB | 4 | 5 |


$p = f(Q)$ Performance limit by standard voltage at -10 % Medium

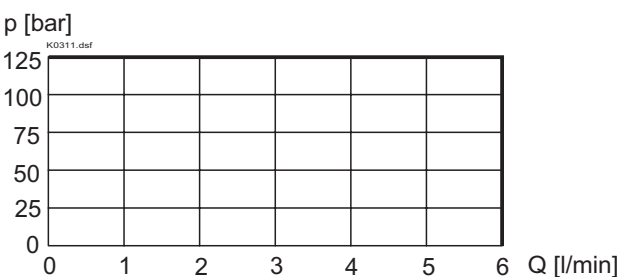


$\Delta p = f(Q)$ Pressure loss/flow characteristics
 1: characteristics from Z.22030AB
 2: characteristics from all valves

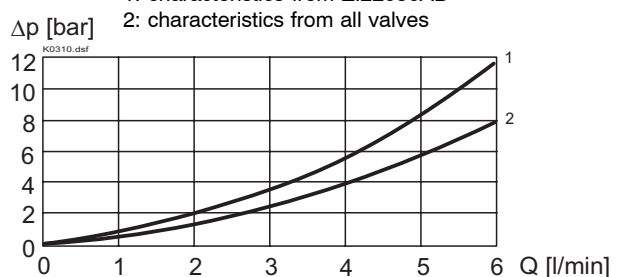
TYPE CHARTS


Z.22031A

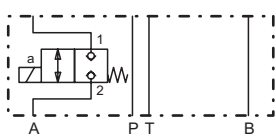


Z.22031P

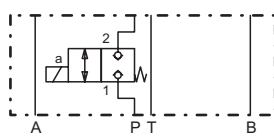


Z.22030A

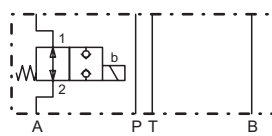


Z.22030P

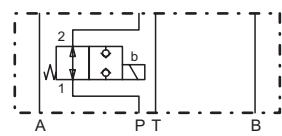


Z.22031B

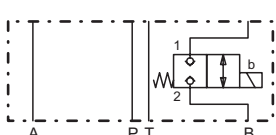


Z.22031T

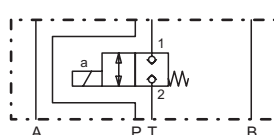


Z.22030B

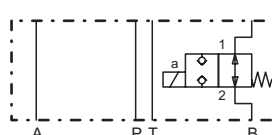


Z.22030T

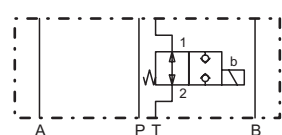


Z.22031AB

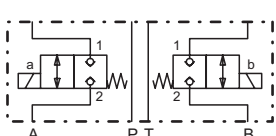




Z.22030AB

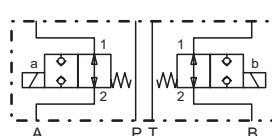



DIMENSIONS

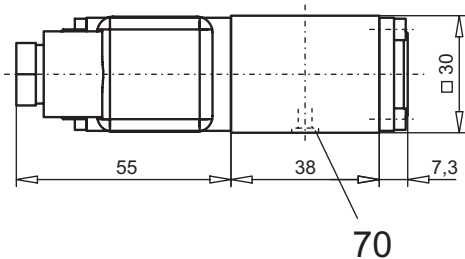 Poppet valve in A, B, P or T normally open
 Poppet valve in P or T normally closed


Poppet valve in A or B normally closed

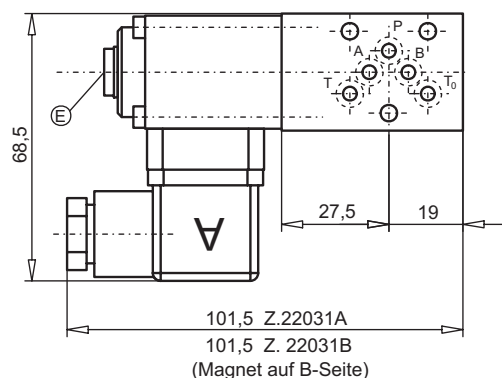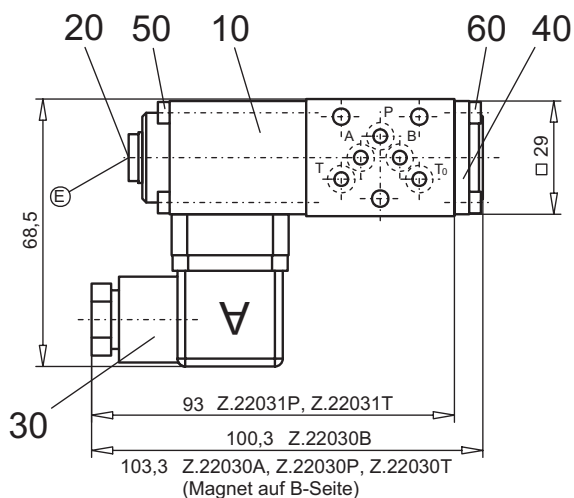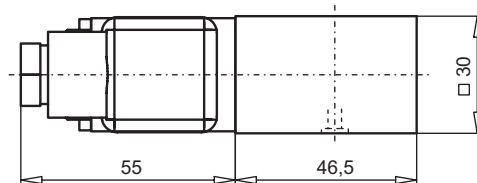

Poppet valve in A and B

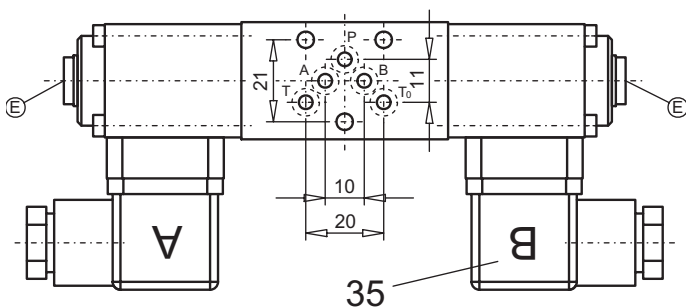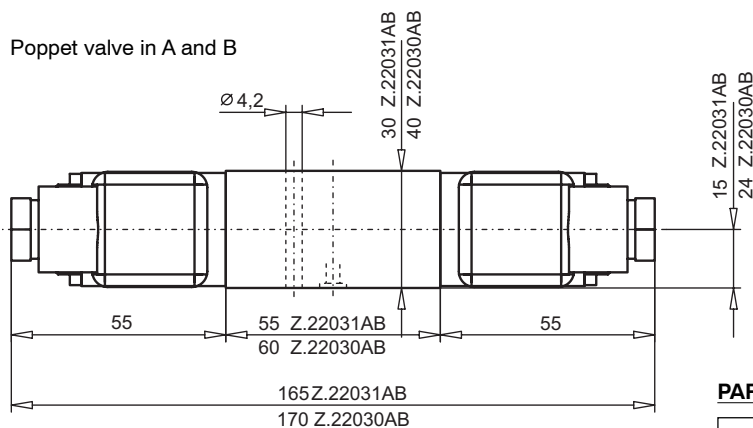

E = air bleed screw

PARTS LIST

| Position | Article | Description |
|----------|----------------------|---|
| 10 | 260.2... 260.3... | Medium-solenoid SIN29V Super-solenoid SIS29V |
| 20 | 239.2033 | Plug (incl. seal) HB0 |
| 30 | 219.2001 | Plug A (grey) |
| 35 | 219.2002 | Plug A (grey) |
| 40 | 056.4203 | Cover |
| 50 | 246.0141 | Socket head cap screw M3x40 DIN 912 |
| 60 | 246.0109 | Socket head cap screw M3x8 DIN 912 |
| 70 | 160.2045 | O-ring ID 4,50x1,50 |

ACCESSORIES

 Threaded connection plates, Multi-flange subplates and
 Longitudinal stacking system see Register 2.9

Technical explanation see data sheet 1.0-100E

