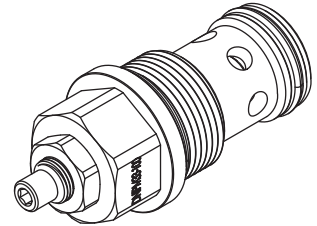


**Throttle valve**
**Screw-in cartridge**

- $Q_{N \max} = 140 \text{ l/min}$
- $Q_{\max} = 140 \text{ l/min}$
- $p_{\max} = 350 \text{ bar}$

**M33x2**  
 ISO 7789

**DESCRIPTION**

Manually adjustable, M33x2 screw-in cartridge throttle valve in accordance with cavity ISO 7789. The cartridge body made of steel is galvanized and therefore rust-protected.

**FUNCTION**

A fine tread on the adjustable throttle reveals an annular gap. The adjusted throttle cross-section produces a pressure drop which determines the volume flow. The volume flow is zero when the throttle is screwed in (the metal sealing edge seals completely). The valve flow is bidirectional.

**APPLICATION**

Throttle valves can be used anywhere where volume flows can be infinitely controlled in both directions without taking pressure fluctuations into account. Stepped tools are available for making the receptacle bores in steel and aluminium (hire or purchase). Please refer to the data sheets in register 2.13.

**CONTENTS**

GENERAL SPECIFICATIONS.....	1
HYDRAULIC SPECIFICATIONS.....	1
SYMBOL.....	1
CONTROL.....	1
CHARACTERISTICS.....	2
DIMENSIONS.....	2
ACCESSORIES.....	2

**TYPEN CODE**

	DN	I	PM33	-	140	#	<input type="checkbox"/>
Throttle valve							
Setting version							
Screw-in cartridge M33x2							
Standard nominal volume flow rates (at 10 bar valve pressure loss)							$Q_N = 140 \text{ l/min}$
Design-Index (Subject to change)							

**GENERAL SPECIFICATIONS**

Description	Throttle valve
Construction	Screw-in cartridge for cavity acc. to ISO 7789
Mounting	Screw-in thread M33x2
Ambient temperature	-20...+50 °C
Mounting position	any
Fastening torque	$M_D = 80 \text{ Nm}$
Weight	$m = 0,37 \text{ kg}$
Volume flow direction	1 ↔ 2

**HYDRAULIC SPECIFICATIONS**

Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 20/18/14...21/19/15 Required filtration grade ( $\beta_{10...25} \geq 75$ ) (refer to data sheet 1.0-50/2)
Viscosity range	12mm <sup>2</sup> /s...320mm <sup>2</sup> /s
Fluid temperature	-20...+70 °C
Peak pressure	$p_{\max} = 350 \text{ bar}$
Nominal volume flow rates	$Q_N = 140 \text{ l/min}$ $Q_N$ at 10 bar valve pressure loss
Max. volume flow	$Q_{\max} = 140 \text{ l/min}$
Leakage volume flow	Almost leak free with closed restrictor


**SYMBOL**

**MECHANICAL ACTUATION**


Screw adjustment with fork wrench and Allen key	
Control stroke $S_b$	= 4,5 mm
Control angle $\alpha_b$	= 1620° / 4,5 turns

**CHARACTERISTICS** Oil viscosity  $\nu = 30 \text{ mm}^2/\text{s}$


$\Delta p = f(Q)$  Pressure drop/flow characteristics

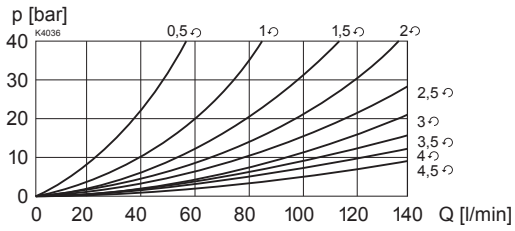

**DIMENSIONS**

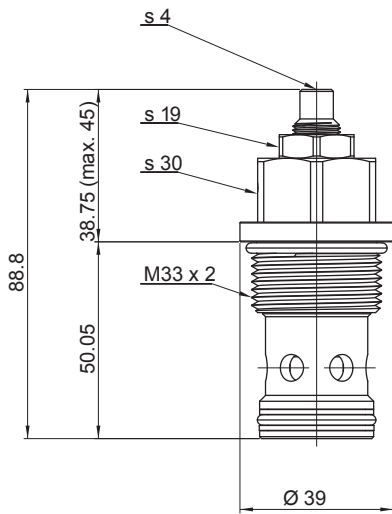

Cavity drawing according to ISO 7789-33-01-0-98

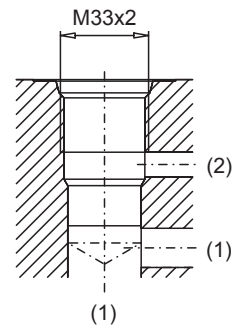

For detailed cavity drawing and cavity tools see data sheet 2.13-1005.

**ACCESSORIES**

Line mount bodies

register 2.9

Technical explanation see data sheet 1.0-100